


GÖLZ®



Floor saws

www.golzgroup.com

Compact and solid Push Saw for small services and repair jobs in roadworks. The height adjustable Anti-Vibration Handles have a clear focus on operators convenience. Compact - Robust - Comfortable.

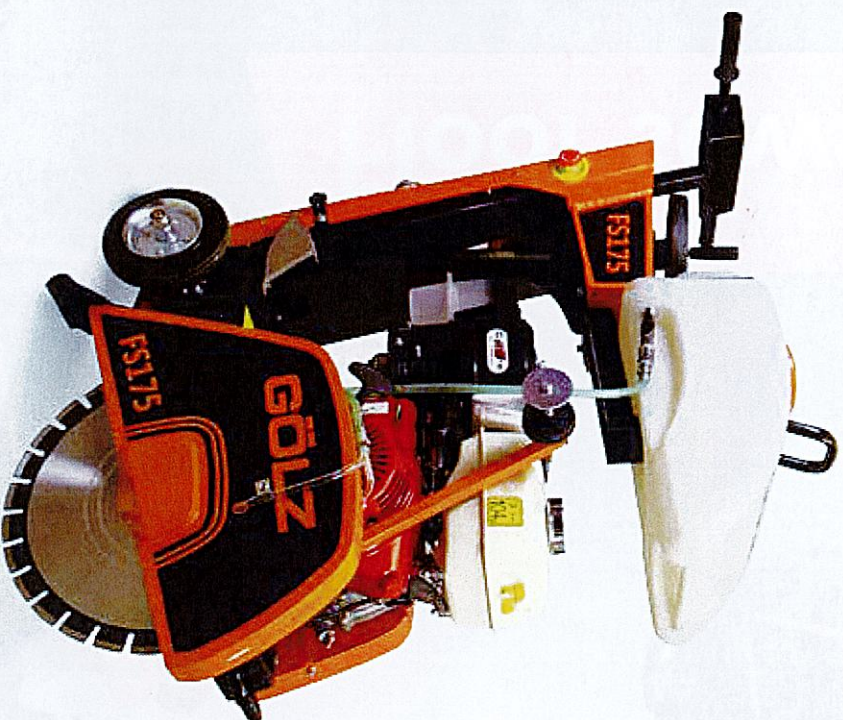

Parking break



Adjustable anti vibration handles for operators comfort



Cutting depth locking device



Lifting frame



Attachable water tank, easy to fill



Cutting depth adjustment by handwheel



Motorstop



Cutting depth indicator

13 HP Honda gas engine Blade-ø 450mm Cutting depth 165 mm

- Adjustable anti vibration handles for operators comfort
- Cutting depth adjustment by handwheel
- Cutting depth indicator
- Front cutting guide
- Parking break
- Lifting frame
- 25 Liter water tank, easy to fill
- Big rear wheels for good chassis clearance
- Durable Poly-V belt for an optimum of power transmission

Specifications	GÖLZ FS175
Max Cutting depth	165 mm
Blade diameter	450 mm
Shaft size	25,4 mm
Water tank	25 liter
Engine	Honda GX390
Engine power (net power)	13HP/9,5kW (11,8HP/8,7kW)
Shaft speed	2.300 min ⁻¹
Feed motion	Push
Cutting depth adjustment	Handwheel
Power transmission	Poly-V Belt
Hand Arm Vibrations	4,5 m/s ²
Dimensions (LxWxH)	1220 x 491 x 1160 mm
Weight	110 kg
Order number	0282 175 6000

Diamond Blades

Diamond Blades for Asphalt and Concrete, please check our Diamond Tools catalogue.

Specifications	Small and medium size floor saws	
	GÖLZ FS125	GÖLZ FS175
Max Cutting depth	120 mm	165 mm
Blade diameter	350 mm	450 mm
Shaft size	25,4 mm	25,4 mm
Water tank	25 Liter	25 Liter
Engine	Honda GX200	Honda GX390
Engine power (net power)	6.5HP/4.8 kW (5.5HP/4,1kW)	13HP/9.5kW (11.8HP/8,7kW)
Shaft speed	2.730 min ⁻¹	2.300 min ⁻¹
Feed motion	Push	Push
Cutting depth adjustment	Handwheel	Handwheel
Power transmission	Poly-V Belt	Poly-V Belt
Hand Arm Vibrations	4,5 m/s ²	4,5 m/s ²
Dimensions (LxWxH)	650 x 450 x 1000 mm	1.220 x 491 x 1.160 mm
Weight	77 kg	110 kg
Order number	0282 125 6000	0282 175 6000

Specifications	Small and medium size floor saws	
	GÖLZ FS170	GÖLZ FS17
Max Cutting depth	190 mm	170 mm
Blade diameter	500 mm	450 mm
Shaft size	25,4 mm	25,4 mm
Water tank	25 Liter	30 Liter
Engine	Honda GX390	Honda GX390
Engine power (net power)	13HP/9.5kW (11.8HP/8,7kW)	13HP/9.5kW (11.8HP/8,7kW)
Shaft speed	2.300 min ⁻¹	2.300 min ⁻¹
Feed motion	Push	Push
Cutting depth adjustment	Footpedal & Pneumatic Spring	Handwheel and Pivot Arm
Power transmission	V-Belt Kit	V-Belt Kit
Hand Arm Vibrations	4,5 m/s ²	1025 x 572 x 1060 mm
Dimensions (LxWxH)	1.210 x 630 x 1.165 mm	
Weight	120 kg	112 kg
Order number	0282 170 1000	0282 017 1000

Specifications	Walk behind floor saws	
	GÖLZ FS190	GÖLZ FS250B GÖLZ FS250D
Max Cutting depth	190 mm	310 mm
Blade diameter	500 mm	800 mm
Shaft size	25,4 mm	25,4 mm
Water-connection	25 Liter	Integrated waterpump
Engine	Honda GX390	Honda GX690
Engine power (net power)	13HP/9.5kW (11.8HP/8,7kW)	25HP/18.5kW (22HP/16,5kW)
Shaft speed	2.100 min ⁻¹	1.600 min ⁻¹ 1.450 min ⁻¹
Feed motion	Elektric	Electro-hydraulic drive Electro-hydraulic
Blade depth control	yes	Continuously adjustable
Cutting depth adjustment	Handwheel	Self-adjusting belt tensioner
V-Belt tension	Manual	1.340 x 880 x 1.040 mm
Dimensions (LxWxH)	1.200 x 630 x 1.010 mm	
Weight	137 kg	285 kg 346 kg
Order number	0282 190 1000	0282 250 4506 0282 250 4510

Specifications	Electric floor saws	
	GÖLZ FS125E	GÖLZ FS23E GÖLZ FS240SE GÖLZ FS40E
Max Cutting depth	120 mm	230 mm
Blade diameter	350 mm	600 mm
Shaft size	25,4 mm	25,4 mm
Water-connection	external	external
Motor	3-phase electric	3-phase electric
Power	400 V, 3 kW; 50-60 Hz	400V; 4kW; 50 Hz
Shaft speed	2.880 min ⁻¹	1.360 min ⁻¹
Feed motion	Push	Push
Cutting depth adjustment	Handwheel	Handwheel
Power transmission	3 Poly-V Belt	Poly-V Belt
V-Belt tension	Manual	Manual
Dimensions (LxWxH)	650 x 450 x 1.000 mm	1.070 x 530 x 890 mm
Weight	85 kg	108 kg 190 kg
Order number	0282 125 6300	0282 023 1000 0282 241 1010 0282 040 1000